

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

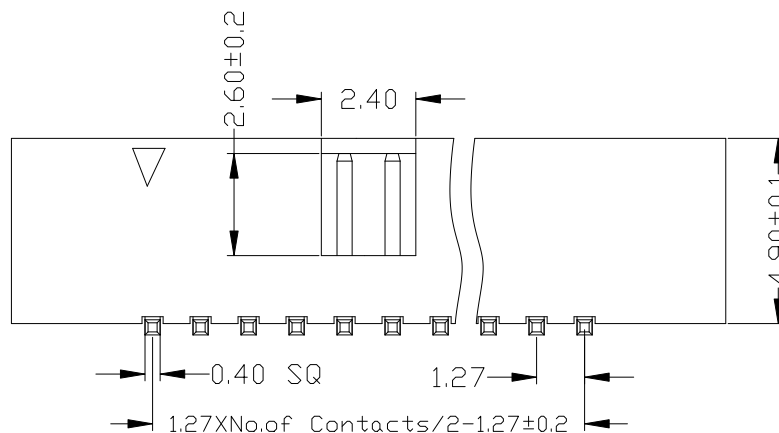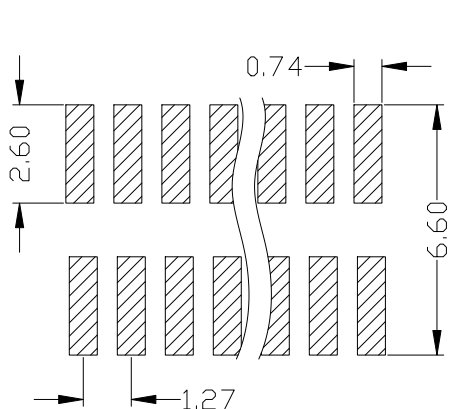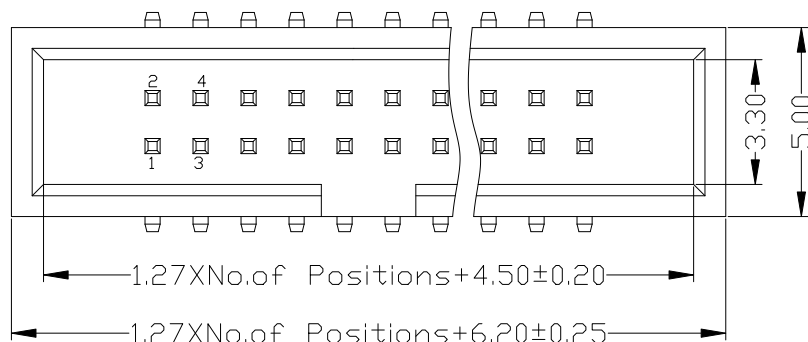

Ordering Information

B349-1 XX XX X M X X

NO.OF PINS	Contact Plating	INSULATOR	B:Black	PACKING
4~100P	Full Of Gold	Semi-gold	MATERIAL: G:Grey427	A:PE Bag
A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel
A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube
A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP
A3=2u"	B3=2U"			E:Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SIZE

A4

DESIGN

卢小强

PART NO.

B349-1XXXXXXMXX1

SHEET

1/1

CHECK

TITLE:

1.27mm 筒牛 塑高4.9 SMT

PROJ.

APPROVE

APPROVE

Customer No.

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------

A

D

C

D

E

T

6

H

1

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

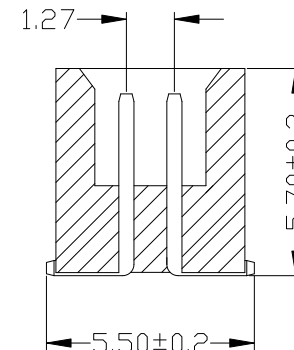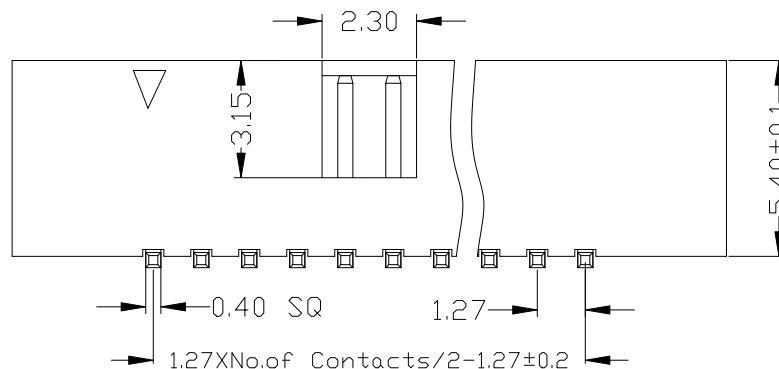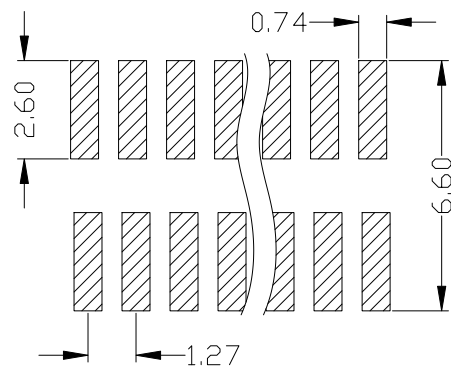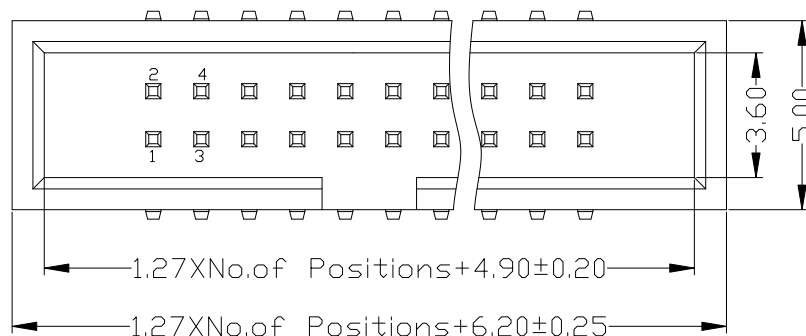

Ordering Information

B355-1 XX XX X M X

NO.OF PINS	Contact Plating	INSULATOR	B:Black	PACKING
4-100P	Full Of Gold	Semi-gold	MATERIAL: G:Grey427	A:PE Bag
	A0=0.8u"	B0=0.8U"	B:PA6T	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	D:Tube+CAP
	A3=2u"	B3=2U"	U:Blue	E:Tray
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

B355-1XXXXXXMXX1

1.27mm 筒牛 塑高5.4 SMT