

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 青铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

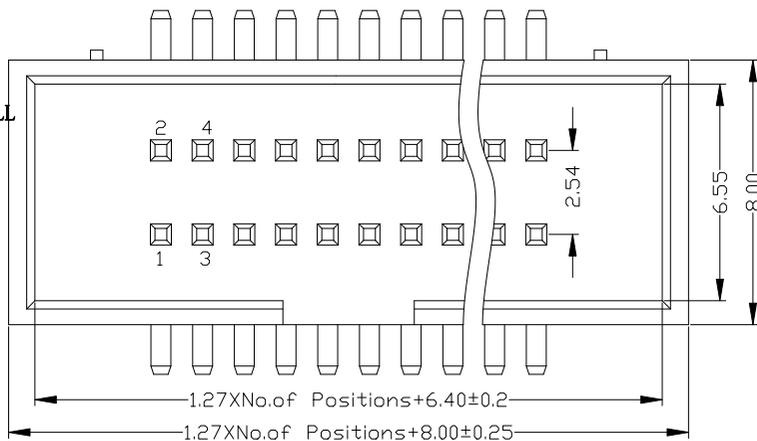

Ordering Information

B459-1 XX XX X M X X

NO. OF PINS 4-100P	Contact Plating	INSULATOR MATERIAL:	B: Black G: Grey427 E: Grey413 U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold	B: PA6T C: PA9T D: LCP	
A0=0.8u"	B0=0.8U"	B: PA6T C: PA9T D: LCP		
A1=1u"	B1=1U"			
A2=1.5u"	B2=1.5U"			
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

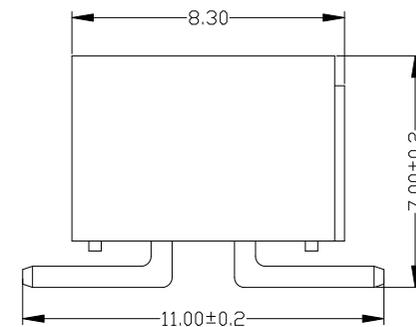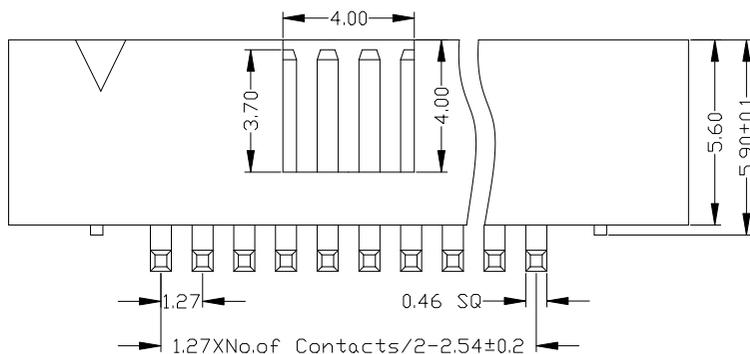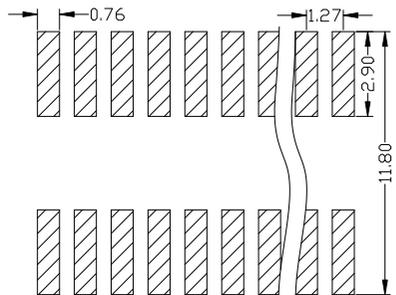

上海高霖电子有限公司

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		MM	
X.XX	±0.20	SIZE	A4	DESIGN	卢小强
X.XXX	±0.10	SHEET	1/1	CHECK	
Angle	±3°	PROJ.	⊕	APPROVE	
DIM	TOL				

PART NO.	TITLE:
B459-1XXXXXMXX1	1.27X2.54 筒牛 塑高5.9 SMT
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

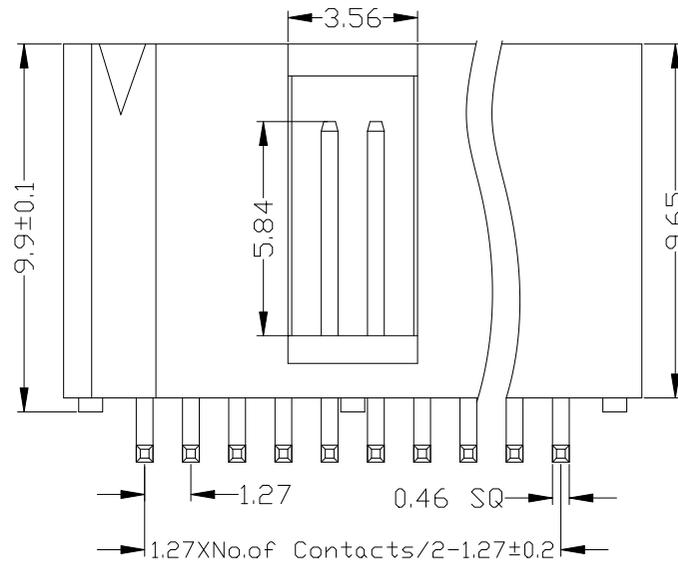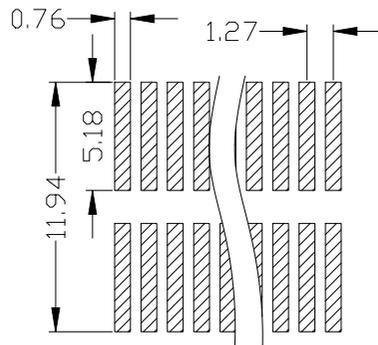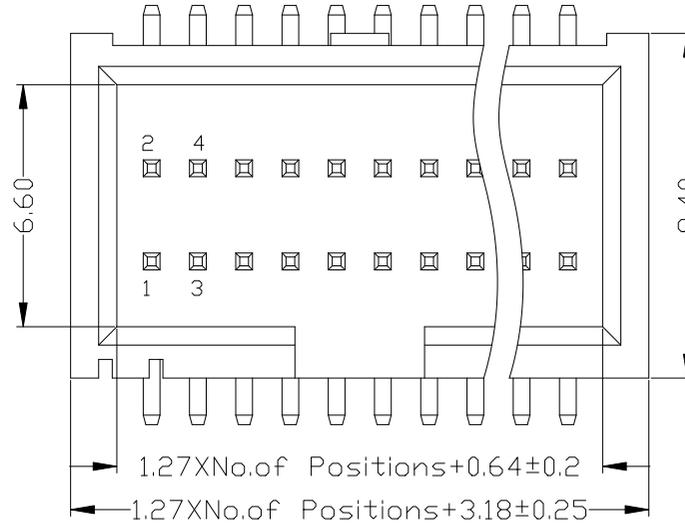

Ordering Information

B499-1 XX XX X M X X

NO. OF PINS 4-100P	Contact Plating	INSULATOR MATERIAL:	B: Black G: Grey427 E: Grey413 C: PA9T W: White U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
A0=0.8u"	Full Of Gold	Semi-gold	B: PA6T	
A1=1u"		B0=0.8U"	C: PA9T	
A2=1.5u"		B1=1U"	W: White	
A3=2u"		B2=1.5U"	U: Blue	
A4=3u"		B3=2U"		
A5=5u"		B4=3U"		
A6=10u"		B5=5U"		
A7=15u"		B6=10U"		
A8=20u"		B7=15U"		
A9=30u"		B8=20U"		
		B9=30U"		
		S1=Ordinary Tin Plated		
		S2=Matte Tin Plated		
		S3=Tin-plated High-temperature		

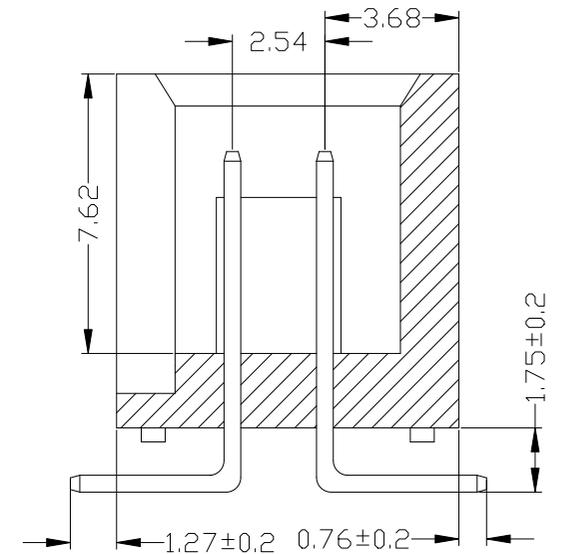

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B499-1XXXXXXMXX1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27X2.54 筒牛 塑高9.9 SMT	
					Angle	±3°	PROJ.	⊕	APPROVE		Customer No.		
					DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

B499-1 XX XX X S X X

NO. OF PINS 4-100P	Contact Plating Full Of Gold	INSULATOR MATERIAL:	B:Black G:Grey427	PACKING A:PE Bag
A0=0.8u"	Semi-gold	B:PA6T	E:Grey413	B:Tape & Reel
A1=1u"	B0=0.8U"	C:PA9T	U:Blue	C:Tube
A2=1.5u"	B1=1U"	D:LCP		D:Tube+CAP
A3=2u"	B2=1.5U"			E:Tray
A4=3u"	B3=2U"			
A5=5u"	B4=3U"			
A6=10u"	B5=5U"			
A7=15u"	B6=10U"			
A8=20u"	B7=15U"			
A9=30u"	B8=20U"			
	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

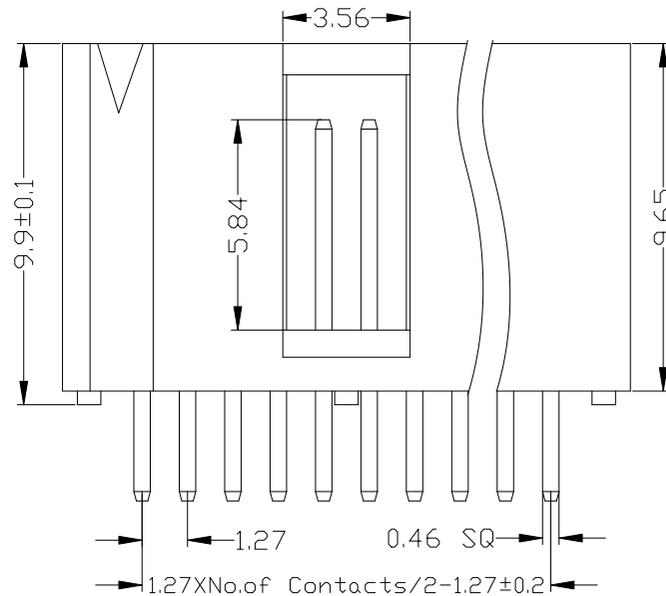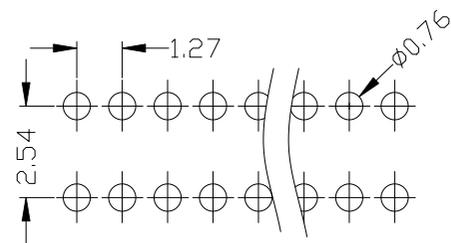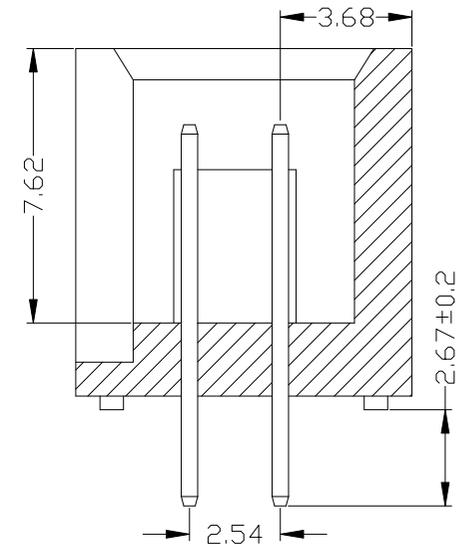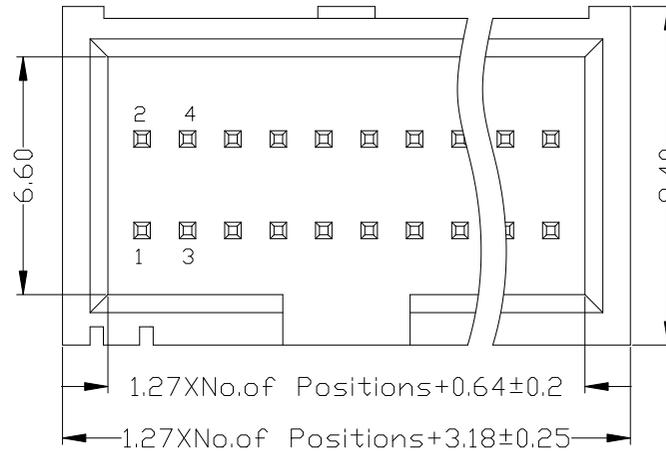

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		MM	
X.XX	±0.20	SIZE	A4	DESIGN	卢小强
X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.
Angle	±3°	PROJ.	☉	APPROVE	TITLE:
DIM	TOL			Customer No.	

上海高霖电子有限公司

卢小强 PART NO. B499-1XXXXXSXX1
TITLE: 1.27X2.54 筒牛 塑高9.9 180度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------

1 2 3 4 5 6 7 8 9 10

