Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯：PA6T/LCP+30%G.F UL94V-0，颜色:黑色.

Housing:PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜，镍底30u"MIN,表面镀金0.8u"MIN

Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性 (characteristics):

额定电流：2 AMP

Raring Current:2 AMP.

接触阻抗：20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗：1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压：AC 500V.

Withstanding Voltage:AC 500V.

温度范围：-40℃ to+105℃

Temperture Range: -40℃ to+105℃

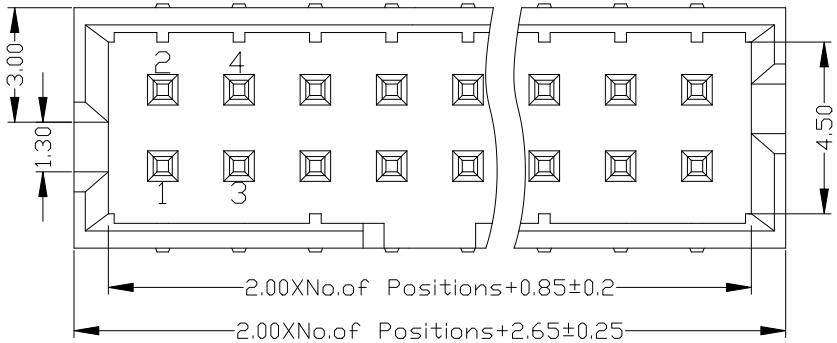

Ordering Information

B265-1 XX XX X M X X

NO.OF PINS	Contact Plating		INSULATOR		PACKING
	Full Of Gold	Semi-gold	MATERIAL:	B:Black	A:PE Bag
4~100P	A0=0.8u"	B0=0.8U"	B:PA6T	G:Grey427	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	E:Grey413	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	W:White	D:Tube+CAP
	A3=2u"	B3=2U"		U:Blue	E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature



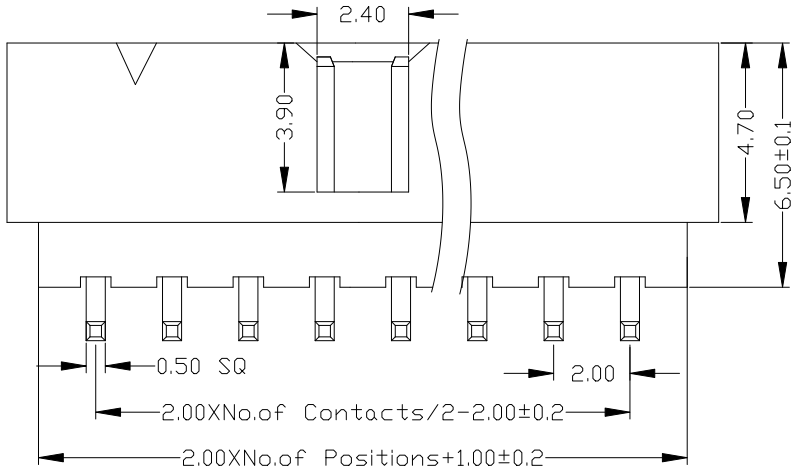

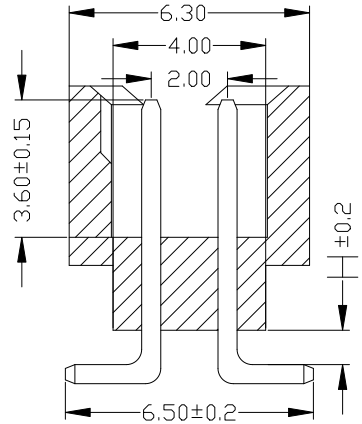

ITEM	H	
Standard	0	0.9
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	卢小强
SHEET	1/1	CHECK	
PROJ.		APPROVE	

上海高霖电子有限公司

PART NO.	B265-1XXXXXMXX1
TITLE:	2.0mm 莫仕简牛 塑高6.5 SMT
Customer No.	

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯：PA6T/LCP+30%G.F UL94V-0，颜色:黑色.

Housing:PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜，镍底30u"MIN,表面镀金0.8u"MIN

Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性 (characteristics):

额定电流：2 AMP

Raring Current:2 AMP.

接触阻抗：20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗：1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压：AC 500V.

Withstanding Voltage:AC 500V.

温度范围：-40℃ to+105℃

Temperture Range: -40℃ to+105℃

Ordering Information

B265-1 XX XX X M X X

NO.OF PINS	Contact Plating		INSULATOR		PACKING
	Full Of Gold	Semi-gold	MATERIAL:	B:Black	A:PE Bag
4~100P	A0=0.8u"	B0=0.8U"	B:PA6T	G:Grey427	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	E:Grey413	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	W:White	D:Tube+CAP
	A3=2u"	B3=2U"		U:Blue	E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

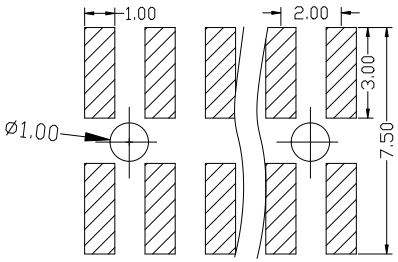

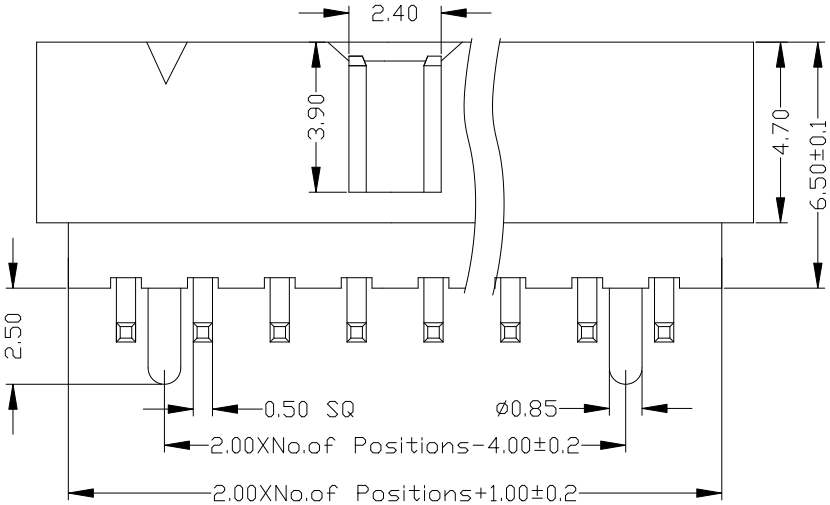

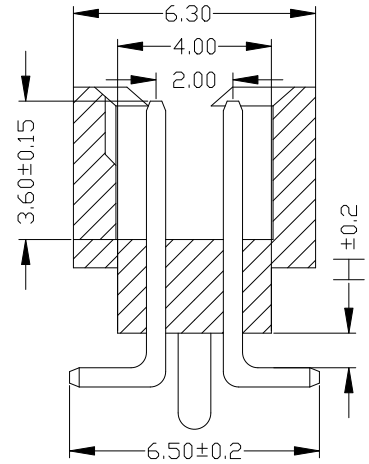

ITEM	H	
Standard	0	0.9
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	卢小强
SHEET	1/1	CHECK	
PROJ.		APPROVE	

上海高霖电子有限公司

PART NO.	B265-1XXXXXMXX2
TITLE:	2.0mm 莫仕简牛 塑高6.5 SMT 带柱
Customer No.	

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯：PA6T/LCP+30%G.F UL94V-0，颜色:黑色.

Housing:PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜，镍底30u"MIN,表面镀金0.8u"MIN

Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性 (characteristics):

额定电流：2 AMP

Raring Current:2 AMP.

接触阻抗：20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗：1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压：AC 500V.

Withstanding Voltage:AC 500V.

温度范围：-40℃ to+105℃

Temperture Range: -40℃ to+105℃

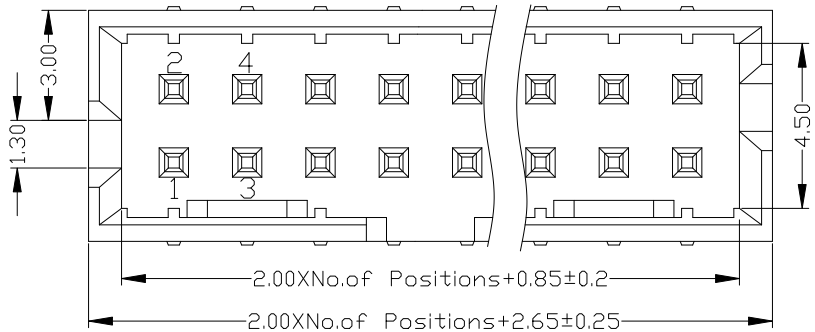

Ordering Information

B264-1 XX XX X M X X

NO.OF PINS	Contact Plating		INSULATOR		PACKING
	Full Of Gold	Semi-gold	MATERIAL:	B:Black	A:PE Bag
4~100P	A0=0.8u"	B0=0.8U"	B:PA6T	G:Grey427	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	E:Grey413	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	W:White	D:Tube+CAP
	A3=2u"	B3=2U"		U:Blue	E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

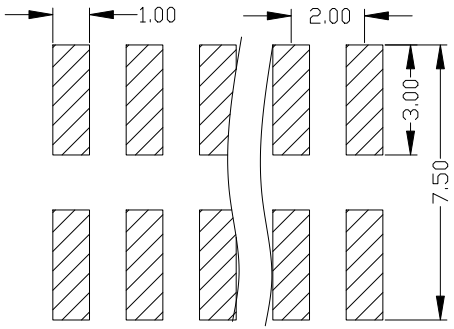

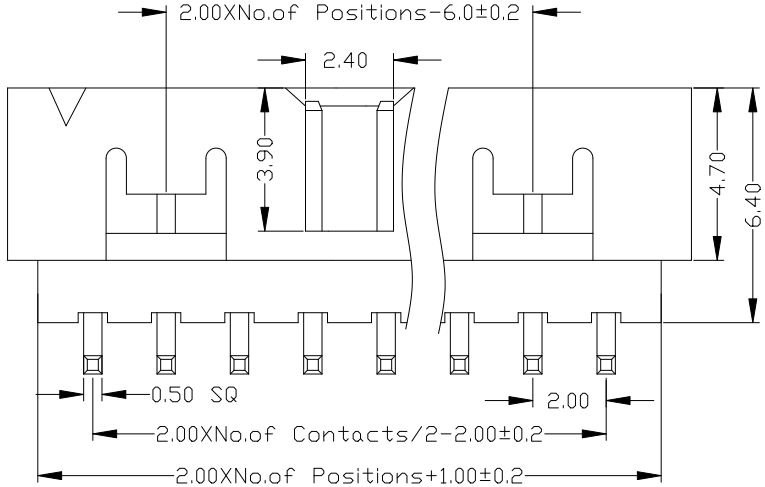

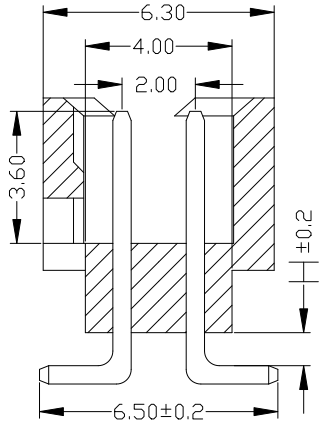

ITEM	H	
Standard	0	0.90
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	卢小强
SHEET	1/1	CHECK	
PROJ.		APPROVE	

上海高霖电子有限公司

PART NO.	B264-1XXXXXMXX1
TITLE:	2.0mm 简牛 塑高6.4 SMT
Customer No.	

Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯：PA6T/LCP+30%G.F UL94V-0，颜色:黑色.

Housing:PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜，镍底30u"MIN,表面镀金0.8u"MIN

Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性 (characteristics):

额定电流：2 AMP

Raring Current:2 AMP.

接触阻抗：20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗：1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压：AC 500V.

Withstanding Voltage:AC 500V.

温度范围：-40℃ to+105℃

Temperture Range: -40℃ to+105℃

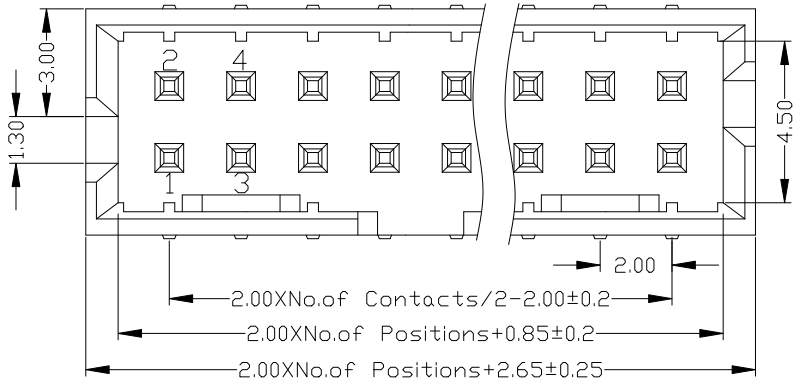

Ordering Information

B264-1 XX XX X M X X

NO.OF PINS	Contact Plating		INSULATOR		PACKING
	Full Of Gold	Semi-gold	MATERIAL:	B:Black	A:PE Bag
4~100P	A0=0.8u"	B0=0.8U"	B:PA6T	G:Grey427	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	E:Grey413	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	W:White	D:Tube+CAP
	A3=2u"	B3=2U"		U:Blue	E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

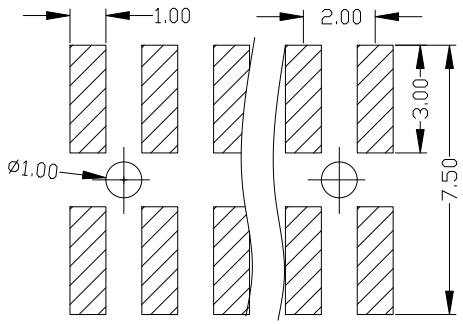

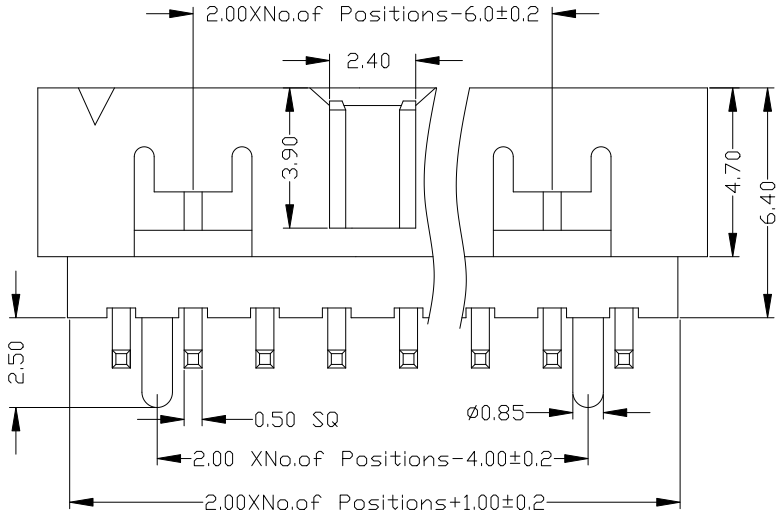

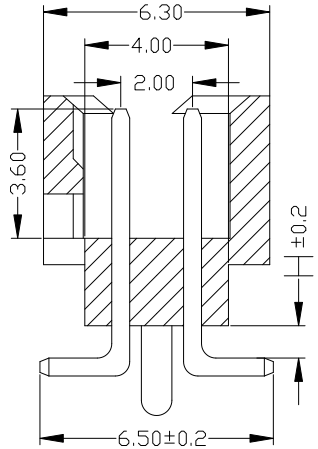

ITEM	H	
Standard	0	0.90
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	卢小强
SHEET	1/1	CHECK	
PROJ.		APPROVE	

上海高霖电子有限公司

PART NO.	B264-1XXXXXMXX2
TITLE:	2.0mm 简牛 塑高6.4 SMT 带柱
Customer No.	