



PR5-60A-013

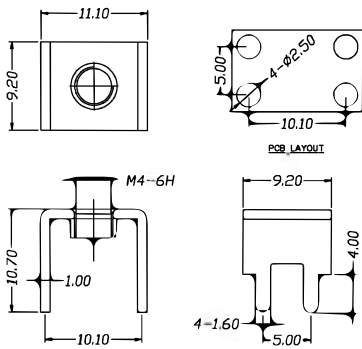

技术参数(Technical Data)

间距(Center Space)	5.0x10.1mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-60A-014

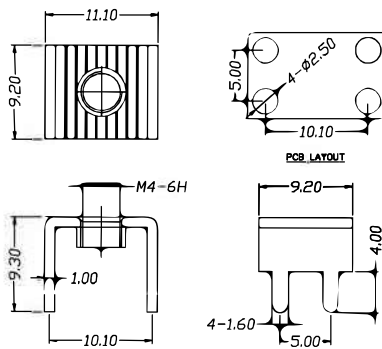

技术参数(Technical Data)

间距(Center Space)	5.0x10.1mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-60A-050



技术参数(Technical Data)

间距(Center Space)	5.0*10.20mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-60A-017



技术参数(Technical Data)

间距(Center Space)	5.8x8.3mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-80A-025



技术参数(Technical Data)

间距(Center Space)	6.5*10.3mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-80A-026



技术参数(Technical Data)

间距(Center Space)	6.5x10.3mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-60A-051



技术参数(Technical Data)

间距(Center Space)	5.0*10.10mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-60A-016



技术参数(Technical Data)

间距(Center Space)	5.0x10.3mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-60A-015

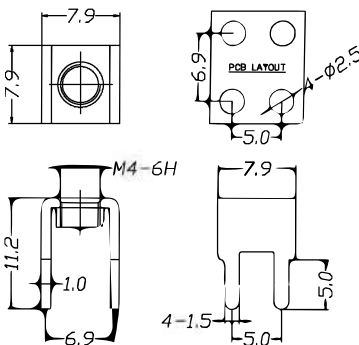

技术参数(Technical Data)

间距(Center Space)	5.0x6.9mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-80A-027

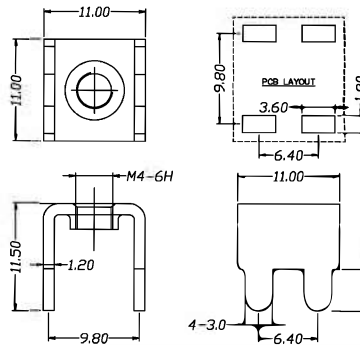

技术参数(Technical Data)

间距(Center Space)	6.4x9.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-80A-028



技术参数(Technical Data)

间距(Center Space)	6.4x9.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in

PR5-80A-029

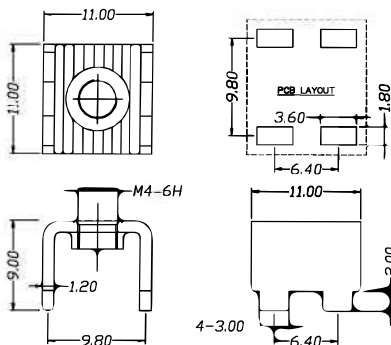

技术参数(Technical Data)

间距(Center Space)	6.4x9.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in