



PR5-80A-047



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-048



技术参数(Technical Data)

间距(Center Space)	6.0x8.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-049

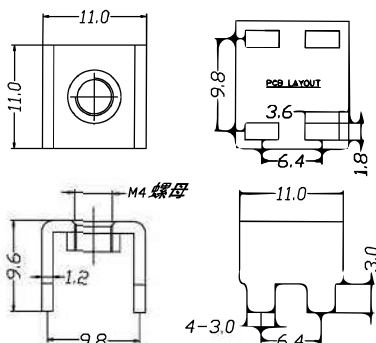

技术参数(Technical Data)

间距(Center Space)	6.4x9.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-052



技术参数(Technical Data)

间距(Center Space)	8.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-053



技术参数(Technical Data)

间距(Center Space)	8.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-100A-019



技术参数(Technical Data)

间距(Center Space)	10.0x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-113



技术参数(Technical Data)

间距(Center Space)	5.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-050



技术参数(Technical Data)

间距(Center Space)	5.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-051

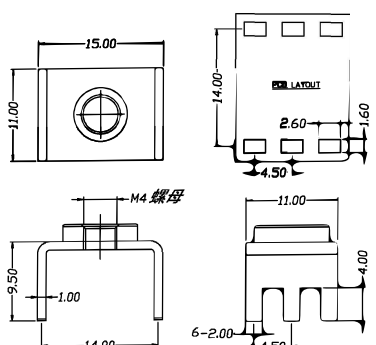

技术参数(Technical Data)

间距(Center Space)	4.5x14.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	12 lbf · in


PR5-100A-020

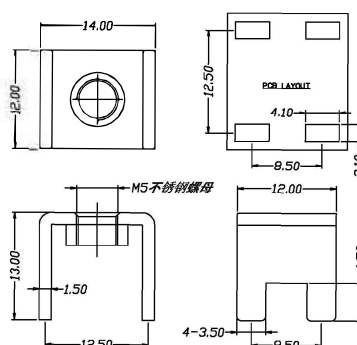

技术参数(Technical Data)

间距(Center Space)	8.5x12.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-100A-045



技术参数(Technical Data)

间距(Center Space)	9.5*20.00mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-046



技术参数(Technical Data)

间距(Center Space)	9.5*20.00mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	55 lbf · in