



PR5-80A-054



技术参数(Technical Data)

间距(Center Space)	6.6x22.5mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-055



技术参数(Technical Data)

间距(Center Space)	6.5x27.5mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-056



技术参数(Technical Data)

间距(Center Space)	6.5x27.5mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-060

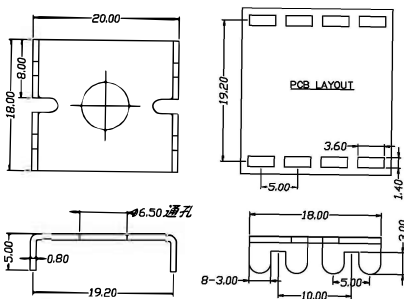

技术参数(Technical Data)

间距(Center Space)	5.0x19.2mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-100A-021

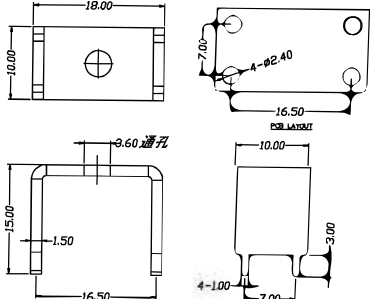

技术参数(Technical Data)

间距(Center Space)	7.0x16.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-120A-034

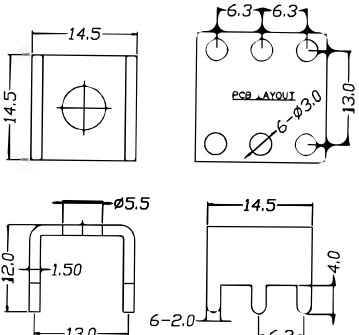

技术参数(Technical Data)

间距(Center Space)	6.3x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-057

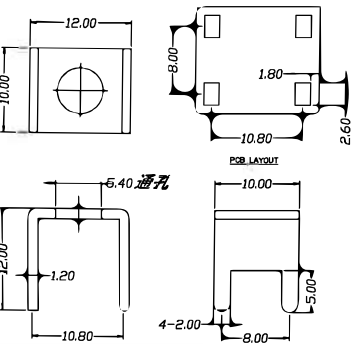

技术参数(Technical Data)

间距(Center Space)	8.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5螺丝过孔
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-058



技术参数(Technical Data)

间距(Center Space)	8.6x12.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-80A-059

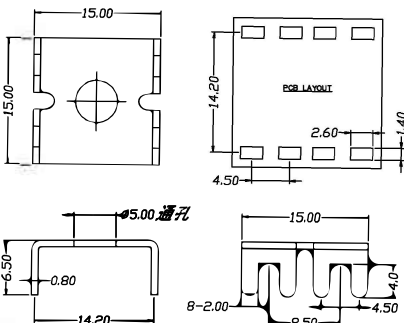

技术参数(Technical Data)

间距(Center Space)	8.5x4.2mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	


PR5-120A-035



技术参数(Technical Data)

间距(Center Space)	6.3x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	

PR5-160A-004

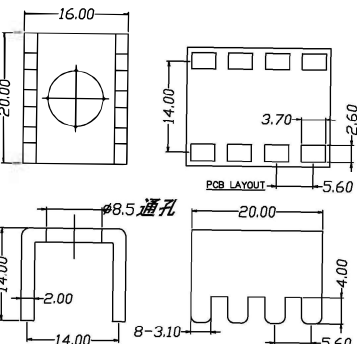

技术参数(Technical Data)

间距(Center Space)	5.6x14.0mm
额定电流(Rated Current)	160A
压线螺钉(Screw)	
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	

QQ 通孔无螺纹直通插80A~160A
QQ THROUGH HOLE NON THREADED STRAIGHT PIN

QQ 通孔无螺纹直通插80A~160A
QQ THROUGH HOLE NON THREADED STRAIGHT PIN