



PR5-50A-024



技术参数(Technical Data)

间距(Center Space)	5.0x7.1mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-50A-025



技术参数(Technical Data)

间距(Center Space)	5.0x7.0mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-50A-026

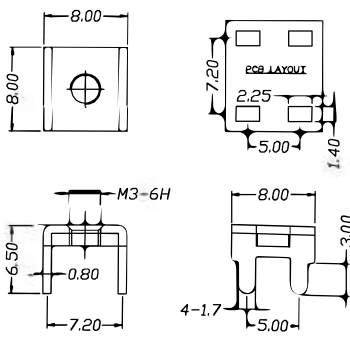

技术参数(Technical Data)

间距(Center Space)	5.0x7.2mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-50A-030



技术参数(Technical Data)

间距(Center Space)	5.0x7.1mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-50A-031



技术参数(Technical Data)

间距(Center Space)	5.0x7.2mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-50A-032

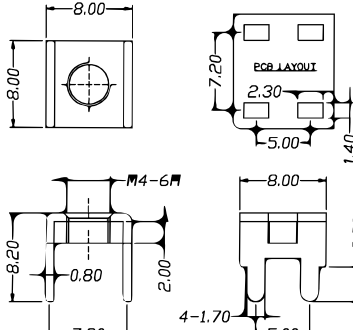

技术参数(Technical Data)

间距(Center Space)	5.0x7.20mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-50A-027

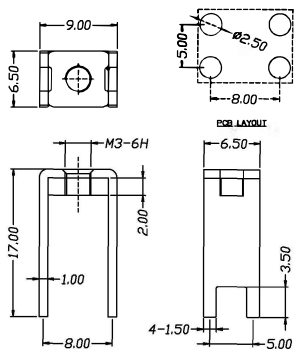

技术参数(Technical Data)

间距(Center Space)	5.0x8.0mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-50A-028

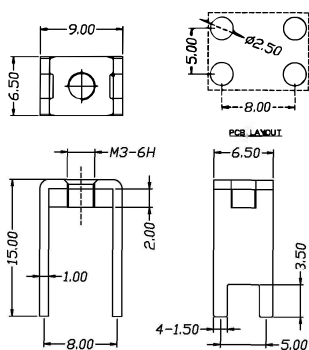

技术参数(Technical Data)

间距(Center Space)	5.0x8.0mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-50A-029

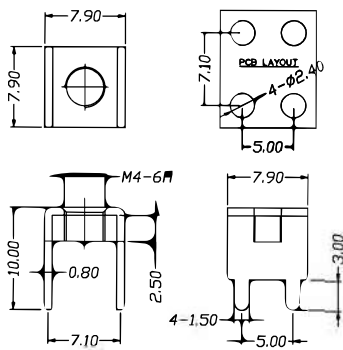

技术参数(Technical Data)

间距(Center Space)	5.0x7.1mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-50A-033

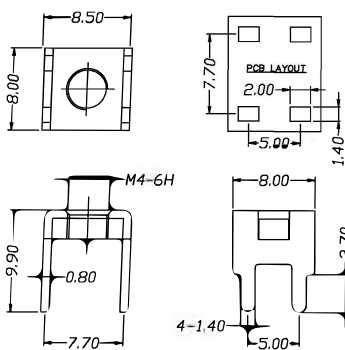

技术参数(Technical Data)

间距(Center Space)	5.0x7.70mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-50A-045

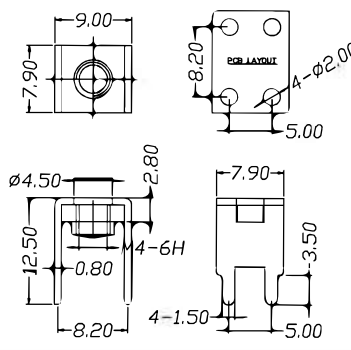

技术参数(Technical Data)

间距(Center Space)	5.0*8.20mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-50A-034

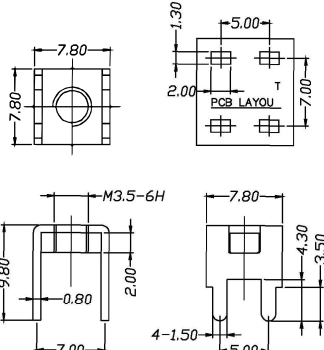

技术参数(Technical Data)

间距(Center Space)	5.0x7.0mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3.5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	10 lbf · in