



PR5-60A-048



技术参数(Technical Data)

间距(Center Space)	5.0x10.1mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-061



技术参数(Technical Data)

间距(Center Space)	6.0x10.5mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-062

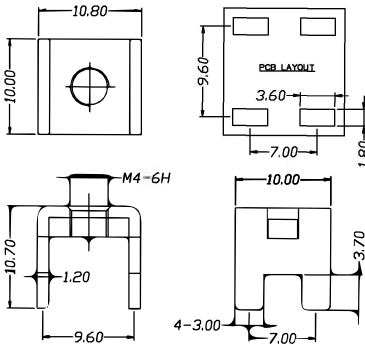

技术参数(Technical Data)

间距(Center Space)	7.0x9.6mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-116



技术参数(Technical Data)

间距(Center Space)	6.0*9.00mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	1.4 lbf · in


PR5-80A-117



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-118



技术参数(Technical Data)

间距(Center Space)	6.0*9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	1.4 lbf · in


PR5-80A-063

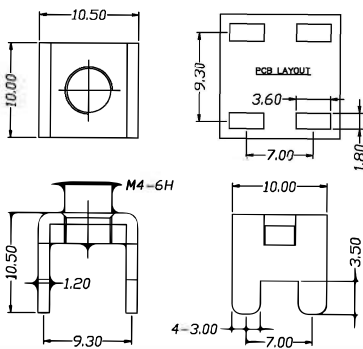

技术参数(Technical Data)

间距(Center Space)	7.0x9.30mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-114



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-115



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-119



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-064



技术参数(Technical Data)

间距(Center Space)	5.0x9.3mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-065



技术参数(Technical Data)

间距(Center Space)	6.5*10.30mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in