



PR5-50A-039

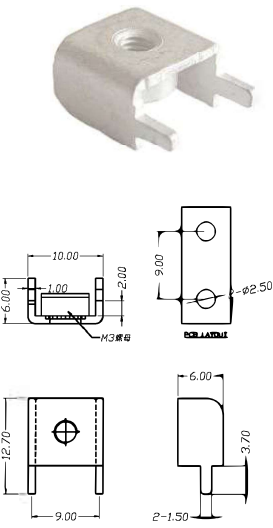

技术参数(Technical Data)

间距(Center Space)	1.50*9.0mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in


PR5-60A-006

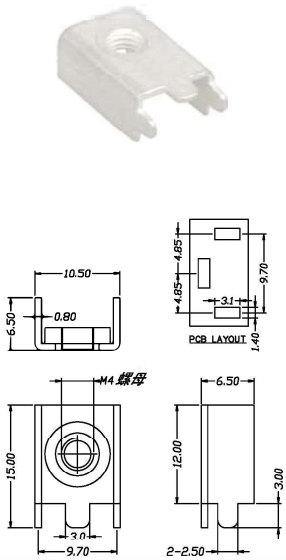

技术参数(Technical Data)

间距(Center Space)	2.5x9.7mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-60A-007

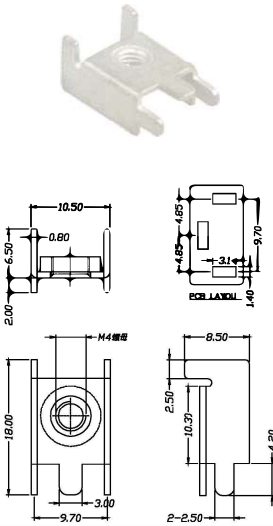

技术参数(Technical Data)

间距(Center Space)	2.5x9.7mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-110A-004

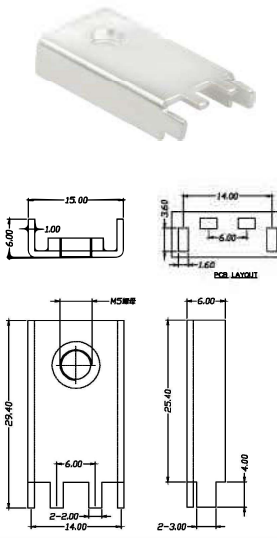

技术参数(Technical Data)

间距(Center Space)	3.0x14mm
额定电流(Rated Current)	110A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-110A-001

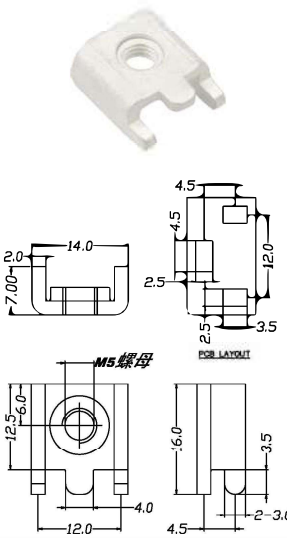

技术参数(Technical Data)

间距(Center Space)	3.0x12.0mm
额定电流(Rated Current)	110A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-60A-053

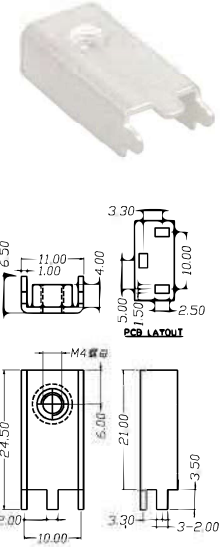

技术参数(Technical Data)

间距(Center Space)	2.0*10.0mm
额定电流(Rated Current)	60A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-014

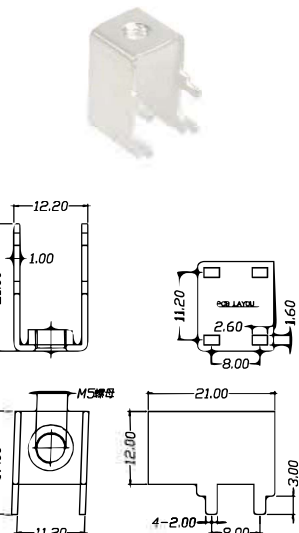

技术参数(Technical Data)

间距(Center Space)	8.0x11.2mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-015

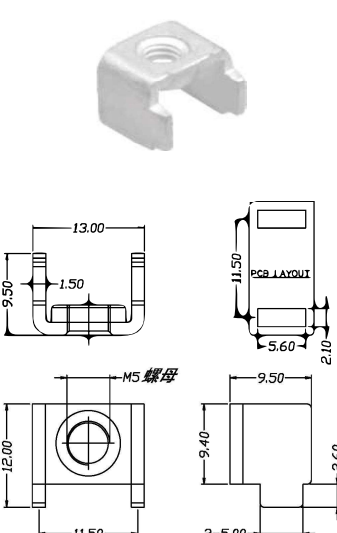

技术参数(Technical Data)

间距(Center Space)	5.0x11.5mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-50A-008

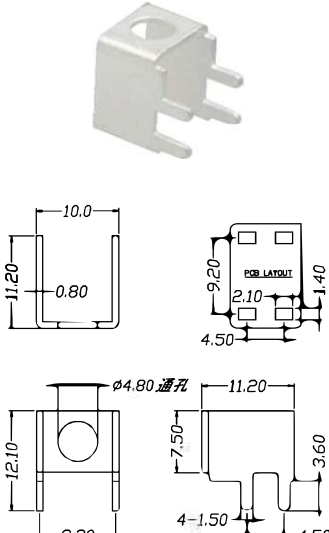

技术参数(Technical Data)

间距(Center Space)	4.5x9.2mm
额定电流(Rated Current)	50A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

KE 50A~110A
KE RIVET NUT SIDE PIN

KE 50A~110A
KE RIVET NUT SIDE PIN

KQ THROUGH HOLE NON THREADED SIDE PIN
KQ 通孔无螺纹侧插脚50A