



PR5-80A-020



技术参数(Technical Data)

间距(Center Space)	4.0x10.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-021

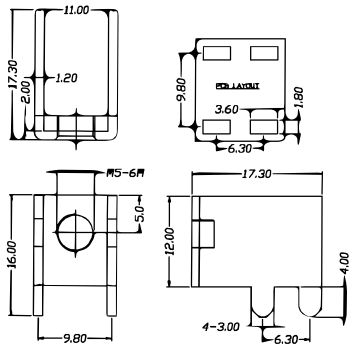

技术参数(Technical Data)

间距(Center Space)	6.3x9.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-80A-022



技术参数(Technical Data)

间距(Center Space)	8.0x11.2mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-90A-003



技术参数(Technical Data)

间距(Center Space)	5.5x11.0mm
额定电流(Rated Current)	90A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-100A-004



技术参数(Technical Data)

间距(Center Space)	6.0x9.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-100A-005



技术参数(Technical Data)

间距(Center Space)	8.25x35.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in


PR5-80A-024



技术参数(Technical Data)

间距(Center Space)	4.5x7.7mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M3.5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	10 lbf · in


PR5-85A-002

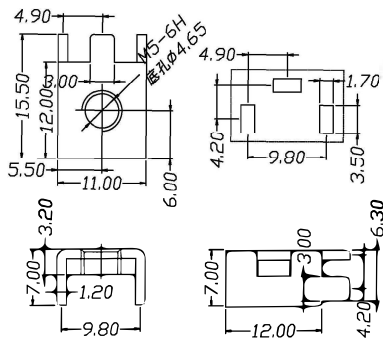

技术参数(Technical Data)

间距(Center Space)	4.2*4.9*9.8mm
额定电流(Rated Current)	85A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-90A-004



技术参数(Technical Data)

间距(Center Space)	5.5x11.0mm
额定电流(Rated Current)	90A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-100A-006



技术参数(Technical Data)

间距(Center Space)	8.2x12.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in


PR5-100A-007



技术参数(Technical Data)

间距(Center Space)	5.5x11.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-110A-002



技术参数(Technical Data)

间距(Center Space)	6.1x15.5mm
额定电流(Rated Current)	110A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass,Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

KT 铆焊式侧边端子
KT RIVETED GASKET SIDE PIN

KT 铆焊式侧边端子
KT RIVETED GASKET SIDE PIN