


MC 系列连接器 MC Terminal Blocks


7.5mm间距 Pitch: 7.5mm

产品信息 Product Information				产品型号/通道数 Order /Poles No.		附件 Accessory
IEC/UL数据 IEC/UL Data	IEC	UL				
额定电流 Rated current	[A]	12	10	锁紧螺钉 Locking crew	-	MC-RJ7.5HXXP-0001 2-24
额定电压 Rated voltage	[V]	630	300	扭矩 Torque	[N·m]	MC-RJ7.5HXXP-K-0001 2-24
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12	固定螺钉 Fixed screw	M2.5	MC-RJ7.5HXXP-I-0001 2-24
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12	扭矩 Torque	[N·m]	0.3
额定冲击电压 Rated impulse voltage	[KV]	6	-	剥线长度 Strip length	[mm]	10-11




MC-RJ7.5HXXP-0001



MC-RJ7.5HXXP-K-0001




MC-RJ7.5HXXP-I-0001

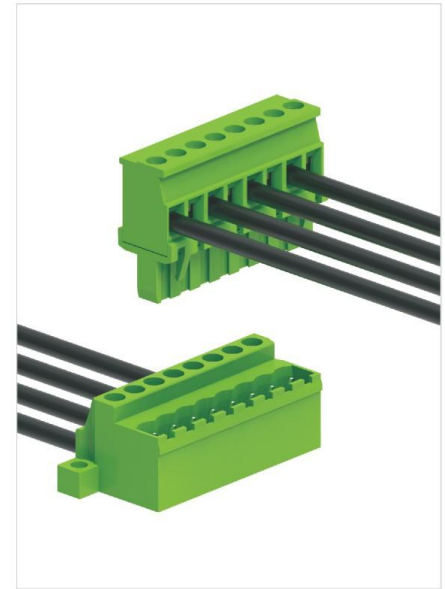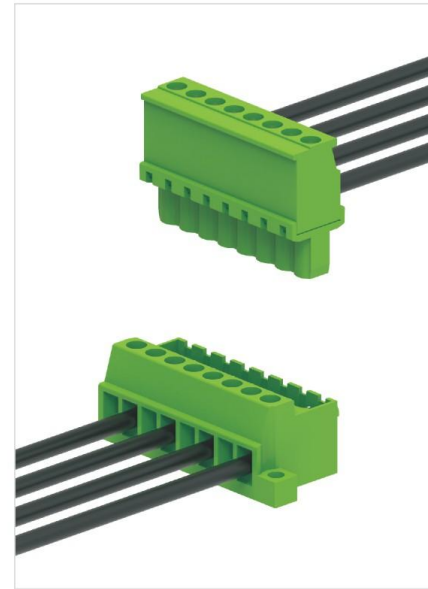


7.5mm间距 Pitch: 7.5mm

产品信息 Product Information				产品型号/通道数 Order /Poles No.		附件 Accessory
IEC/UL数据 IEC/UL Data	IEC	UL				
额定电流 Rated current	[A]	18	15	锁紧螺钉 Locking crew	-	MC-PA7.5HXX-0002 2-24
额定电压 Rated voltage	[V]	630	300	扭矩 Torque	[N·m]	MC-PA7.5HXX-F-0002 2-24
硬导线截面积 Solid	[mm²][AWG]	-	-	固定螺钉 Fixed screw	M2.5	MC-PA7.5HXX-G-0002 2-24
柔性导线截面积 Flexible	[mm²][AWG]	-	-	扭矩 Torque	[N·m]	0.3
额定冲击电压 Rated impulse voltage	[KV]	6	-	剥线长度 Strip length	[mm]	MC-PA7.5HXX-I-0002 2-24


MC-PA7.5HXX-0002




MC-PA7.5HXX-F-0002




MC-PA7.5HXX-G-0002




MC-PA7.5VXX-0002



MC-PA7.5VXX-F-0002




MC-PA7.5VXX-G-0002



7.5mm间距 Pitch: 7.5mm

附件 Accessory

MC-PA7.5HXX-I-0002



MC-PA7.5VXX-I-0002

